

⑪ Publication number:

0 094 829
A2

⑫

EUROPEAN PATENT APPLICATION

⑳ Application number: 83302783.2

⑤① Int. Cl.³: A 61 F 1/03

㉔ Date of filing: 17.05.83

㉓ Priority: 17.05.82 GB 8214347

㉒ Date of publication of application:
23.11.83 Bulletin 83/47

㉑ Designated Contracting States:
CH DE FR LI


㉑ Applicant: Field, Richard Eddy
Park Manor Farm
Fearby Near Masham North Yorkshire(GB)

㉒ Inventor: Field, Richard Eddy
Park Manor Farm
Fearby Near Masham North Yorkshire(GB)

㉓ Representative: Parker, Geoffrey
Patent Department National Research Development
Corporation 101 Newington Causeway
London SE1 6BU(GB)

㉔ Endoprosthesis bone joint devices.

㉕ An endoprosthesis bone joint device is secured by filamentary elements driven therethrough into penetrating engagement with bone. These elements will normally exhibit transverse flexibility; they preferably have elastic modulus similar to bone; they can be roughened or barbed for added securement; they can carry material of negative electrochemical potential relative to other parts of the device to induce bone growth intimately therewith; and they can carry material otherwise beneficial to bone growth. The device preferably also has a radiating multi-directional flange formation to engage a corresponding formation cut in the bone.

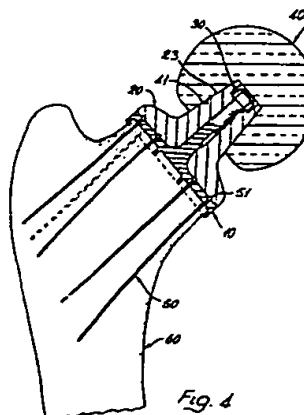

ENDOPROSTHETIC BONE JOINT DEVICES

This invention concerns endoprosthetic bone joint devices and relates more particularly to the securement of such devices to bone, especially, but not exclusively, to one end of a long bone.

- 05 Various techniques for such securement have been proposed but those currently established in routine usage commonly involve the penetration into cancellous bone by elongate rigid members of significant size relative to the bone and as a proportion of the overall device.
- 10 In the most common of these techniques an elongate member is located as a clearance fit in a pre-prepared site and is secured by the use of a gap-filling medium such as an acrylic cement. While generally satisfactory in many instances, this technique can be problematical if any movement occurs at either of the two
- 15 interfaces which exist between the gap-filling medium on the one hand and the member and the bone on the other hand. Moreover, such movement can occur as a natural consequence of the differing properties which in practice inevitably occur between the materials of the member, the medium and the bone, particularly as bone is a
- 20 living material having properties which vary in an individual patient and from one to another. This technique has been improved in recent years by an emphasis on site preparation involving very thorough cleansing followed by pressurised application of the gap-filling medium to enhance the penetration thereof into the
- 25 bone, but difficulty can still occur.

Another technique seeks to effect improvement by the use of a member having a porous coating or equivalent formation which affords securement not by way of a gap-filling medium but instead by the inward growth of natural fibrous material which ossifies

30 within the member. This can be viewed as problematical by virtue of the inevitable initial period of significant length during which the device is relatively insecure and the patient must be at least partially immobilised. Moreover, longer term difficulty

- 2 -

can arise by resorption of ossified in-grown material as a result of differential properties between this material and that of the member.

05 In yet another technique a member is secured by a tapered interference fit in the bone. A difficulty in this case is that either the fit is localised over only a part of the member such that movement can develop due to the forces acting on the device during subsequent use, or the fit is sufficiently extensive that the initial penetration involves a risk of undue damage to the
10 bone. Again, differential material properties can cause difficulty.

It should be understood that these comments on particular techniques for securement to bone are by no means exhaustive but are intended to provide a brief and somewhat generalised appreciation of the difficulties of a complex situation. However, it
15 will be evident that a common cause of difficulty arises from the largely inevitable use of materials having different properties from bone, and such a difficulty is heightened in its consequences by use of those materials for penetration in relatively bulky
20 form. Moreover, such penetration can be problematical in other ways. For example, the very nature of the penetration is such that any introduced infection will be deeply sited. Also, such penetration can require the removal of a significant volume of bone during site preparation and this is doubly disadvantageous
25 in the consequent reduction of blood flow and in compromising the availability of remedial measures if the associated device is not successful.

It should be mentioned for completeness in this general context that a securement technique does exist in which the above
30 difficulties are notably less evident, but the technique is only commonly applicable to particular situations. The technique in question involves the use of relatively shallow devices having a relieved surface configuration, but no elongate members, for cooperation with a gap-filling medium in a naturally concave site
35 such as the acetabulum of the hip joint. The same technique has

- 3 -

been applied to form an effective capping for the femoral head at the hip, but this appears not have been sufficiently successful to have induced a widespread routine usage due, at least in part, to inadequacy of the resultant anchorage in surviving the
05 forces which act thereon during subsequent usage of the device.

An object of the present invention is to provide a further technique, and devices therefor, whereby the various difficulties discussed above are reduced. To this end the invention centres in general terms on the provision of a multiplicity of filamentary
10 elements to be driven through part of the device into bone.

Clearly, these elements will not possess, individually or collectively, the relative bulk of the prior penetrating elongate members and this contributes to a reduction in any potentially disadvantageous consequences which can otherwise arise from
15 differential material properties or loss of bone as discussed above. At the same time the elements can penetrate the bone to a significantly greater extent than the prior relatively shallow relieved structures and so afford a more secure anchorage against the effects of the forces which occur in subsequent use of the
20 device. Moreover, this last anchorage can be enhanced by penetration of the elements in a variety of directions to suit an individual situation, whereas the penetration geometry is largely predetermined with the prior devices.

The elements are intended to penetrate the cancellous material
25 of the bone, including the trabecular structure of the medulla. The elements must have sufficient rigidity and other appropriate mechanical properties for this purpose so as to be substantially incompressible relative to the bone material, but the elements will normally exhibit some transverse flexibility to allow bending.
30 Such bending can act to facilitate introduction of the elements, and mutual splaying of the elements resulting from bending will enhance the overall anchorage. Also, a bending capability can potentially accommodate changes in the surrounding bone structure which a bulky rigid material cannot. In this last connection
35 also, the elements are preferably made of a material having an elastic modulus generally similar to that for bone.

- 4 -

The elements are intended to be in direct contact with the bone material without the intervention of gap-filling medium, but the individual contribution of any one element to the overall resultant anchorage can be enhanced in various ways. For example, the elements can be roughened, barbed or otherwise formed to act mechanically against subsequent movement relative to the bone. Also, the elements can be treated or formed to induce or accommodate growth of bone into intimate contact therewith. In one form of the invention for this purpose, the elements are employed covered with or incorporate material such as hydroxyapatite beneficial to bone growth as a substrate, nutrient or protection. In another such form of the invention, the elements are covered with or incorporate a material having negative electrochemical potential with respect to other parts of the device to induce natural growth towards the elements. These two forms of the invention can be combined if the added material gives rise to cathodic dissolution products beneficial to bone growth, or if the cathodic dissolution progressively releases, or exposes for release, additional material incorporated therewith.

In practice the elements can be provided with a uniform length equating with the maximum likely to be needed, with this length being shortened selectively by the surgeon as required in individual situations. Alternatively, a range of lengths can be supplied by the manufacturer.

Also in practice it is appropriate to provide the elements with enlargements at one end for captive locking under compression between two parts of the related device with the free ends of the elements penetrating the bone.

Another preferred feature of the invention is that the part of the device to be located against the bone which the elements penetrate should have a flanged formation projecting therefrom to engage a corresponding slot formation cut in the bone, these formations being multi-directional. More particularly, it is further preferred at present that this formation on the device should comprise flange portions radiating from the central region

- 5 -

of the bone-engaging part towards the periphery thereof to transfer shear force loads towards the bone cortex, which last can suitably be embraced by a peripheral annular flange portion.

The invention as so far described is clarified, by way of
05 example, with reference to one embodiment thereof illustrated in the accompanying drawings in which:-

Figures 1 and 2 respectively illustrate one part of the embodiment in partially sectioned side view and inverted plan view,

10 Figure 3 illustrates in cross-sectional view another such part, and

Figure 4 illustrates these two parts in use with other parts and the associated filamentary elements.

The embodiment of the drawings is a femoral component for
15 use in the hip joint as a hemiarthroplasty in replacement of the natural femoral head, or in that joint as part of a total arthroplasty additionally involving an acetabular component replacing the associated natural pelvic socket in which the head articulates.

The component part in Figure 1 is denoted 10 and comprises a
20 plate 11 of disc form having a shaft 12 projecting coaxially from one side thereof. This shaft is formed with a key, spline or similar anti-rotation formation at 13 towards its base and is also externally threaded at 14 towards its free end.

On its other side the plate has a flange formation projecting
25 axially therefrom, this formation including a peripherally and concentrically located outer annular skirt 15, a centrally and concentrically located inner annular skirt 16, and a plurality of radially interconnecting webs 17.

Lastly, the part 10 has a plurality of apertures 18 passing
30 axially therethrough between the skirts and webs, each such aperture opening into a hemispherically countersunk recess 19 in the one side of the plate.

The component part of Figure 3 is denoted 20 and comprises
an annular body 21 which converges over its length, which length
35 corresponds to that of shaft 12, through a curved portion 22 at the wider end to a terminal conical taper 23 at the narrow end.

- 6 -

The wider end of the body is of corresponding shape to plate 11 and has a plurality of hemispherical recesses 24 corresponding in diameter and distribution to recesses 19. The central passageway of the body is formed with a keyway, spline or other formation at 25 towards the wider end in complementary manner to that at 13 on the shaft 12 to engage non-rotatably thereon with the recesses 19 and 24 superimposed, and the passageway is counterbored at 26 at the narrow end of the body.

Figure 4 illustrates remaining parts of the component. The parts in question comprise a nut 30 to engage the thread 14 of shaft 12 and seat in the counterbore 26 of body 21, a ball 40 having a conically tapered bore 41 partway therethrough to engage the taper 23 of body 21, and a plurality of filamentary elements 50 sized to pass through apertures 18 and having spherical enlargements 51 at one end complementary with recesses 19 and 23.

Use of the component is also shown by Figure 4. The femoral head of a femur indicated in partial outline at 60 is excised through the neck to receive component part 10 thereover. The flange formation of this part engages the bone, complementary slots having been cut in the latter to receive the webs 17 and the inner skirt impacting into the upper end of the medulla.

The filamentary elements 50 are then driven through respective apertures 18 into the cancellous bone, the terminal enlargements 51 seating in the recesses 19. The elements are driven in varying directions, suitably to follow the general trabecular pattern in the bone, the elements being selectively sized to avoid emergence through the bone cortex.

Thereafter the component part 20 is engaged over and keyed with the part 10 to seat its recesses 24 over the enlargements 51, this sub-assembly is secured by the nut 30, and the ball 40 is engaged on the part 20 by interference fit between the respective mutually complementary tapers 41 and 23.

The filamentary elements can number between five and thirty, and suitably vary between 3 and 15 cm in length and 0.25 and 2.0 mm in diameter. Regarding materials: the elements are suitably of

- 7 -

surface sintered high tensile titanium wire with titanium heads welded thereon, the plate parts 10 and 12 are suitably of a cast chromium-cobalt alloy, the nut can be of similar metal to the plates but with a polyethylene linear to lock the same, and the
05 ball is suitably of a ceramic.

While the invention has just been described with more particular reference to the illustrated embodiment, it is variable in different ways.

Application is, of course, not confined to a femoral
10 component. However this example is apt insofar as such components are the longest established and still most widely used in routine orthopaedic practice involving an endoprosthesis. In addition femoral components in common current usage typify the difficulties first discussed above.

15 Also, the materials suitable for use with the invention can vary from those indicated for the embodiment and can include other metals, and synthetic and composite materials. Carbon composite material, such as carbon-reinforced carbon fibre form, is thought particularly suitable for the penetrating elements
20 because the elastic modulus can be similar to that for bone and a selected porosity can be provided.

The number and distribution of the penetrating elements can of course be varied to suit individual circumstances. However, it is thought appropriate to concentrate these elements medially
25 and laterally in relation to the femur, these locations being, according to current thinking and understanding, the main load bearing regions within the femur. Moreover, because these regions are considered to be respectively subject to compressive and tensile load forces, the elements may be correspondingly of
30 different forms to better take account of these forces.

The shape of the disc form plate can vary between circular and substantially elliptical to suit the direction of the cut made to excise the femoral head. In nature, apart from differences in overall bone size, the femoral neck has a cross-
35 sectional shape which progresses from circular just below the

- 8 -

head to elliptical towards the greater trochanter. Thus provision of a range of shapes as above will be appropriate to suit variation of cut direction by the surgeon and some of this range can be associated with a shaft which is slightly inclined from an axial disposition to allow for a slightly oblique cut. However, it is expected that further development of the invention will determine optimum excision geometry whereby a requirement for undue variation in component geometry is avoided.

A further alternative which may well be found to be preferable is to form the distal surface of the plate, i.e. that surface which is in aposition with the cut surface of the femoral head, as part of a sphere such that all points of contact between plate surface and bone are equidistant from the centre of the prosthetic femoral head. Furthermore the radius of the sphere will be equal to the distance between the centre of the prosthetic head and the plate to bone interface. By this configuration it is predicted that with the exception of frictional forces arising from the interface between the prosthetic femoral head and the acetabular component, all forces passing through the femoral neck will pass through the plate to bone interface perpendicular to the interface thus minimising or avoiding shear forces on this interface.

It may also be advantageous to provide a range of separate peripheral skirt members for the proposed femoral component, such members being intended to clip in place. These members will serve to provide a smooth surface to abut with adjacent muscles and other parts of the natural capsule of the hip joint, and offer a choice of depth to suit the requirements of individual patients in this respect.

In yet another variation, the radial flanges can be extended to penetrate the bone further and, in fact, act as the main anchorage for the component. In this case the flanges are, as noted for the filamentary elements, preferably matched to bone in respect of elastic modulus, and additionally formed to promote in-growth. Indeed, these last features can be suitably increased in effect towards the free ends of the flanges.

- 9 -

Lastly, as an indication of the powers of securement afforded by the presently proposed technique: a simplified form of the illustrated embodiment has been made without flanges and secured to the femoral neck of a glycerine embalmed femur with 12 filaments each no longer than 4 cm. This mock-up was tested on an Instron or other compression loading machine at loads of up to 1000 lb without evident deformation either visually or as judged by comparison of pre- and post-stress X-rays.

- 10 -

CLAIMS

1. An endoprosthetic bone joint device comprising a multiplicity of filamentary elements drivable through part thereof into penetrating engagement with a bone to secure the part thereto.
2. A device according to Claim 1 wherein said elements exhibit
05 transverse flexibility.
3. A device according to Claim 2 wherein said elements have an elastic modulus similar to that of bone.
4. A device according to Claim 1, 2 or 3 wherein said elements are roughened, barbed or otherwise formed to act against movement
10 relative to bone when penetrated thereinto.
5. A device according to any preceding claim wherein said elements are treated or formed to induce or accommodate growth of bone into intimate contact therewith.
6. A device according to Claim 5 wherein said elements are
15 covered with or incorporate material beneficial as a substrate, nutrient or protection for bone growth.
7. A device according to Claim 5 or 6 wherein said elements are covered with or incorporate material having a negative electro-chemical potential with respect to other parts of the device.
- 20 8. A device according to any preceding claim wherein said elements each have an enlargement at one end thereof captively lockable between two parts of the device.
9. A device according to Claim 8 wherein one of said parts has a plate form portion having distributed thereover a plurality of
25 transverse passageways to receive individually therethrough said elements and countersunk on one side of said portion to seat said enlargements, and the other of said parts has a surface complementary with said one side and formed with a plurality of recesses in corresponding distribution to said passageways to seat indivi-
30 dually said enlargements therein, said two parts being securable together with said passageways and recesses superposed.
10. A device according to any preceding claim wherein the first-mentioned part thereof has a bone-engaging surface with a multi-directional flange formation projecting therefrom to engage a
35 corresponding formation cut in bone.

- 11 -

11. A device according to Claim 10 wherein said flange formation comprises a plurality of flange portions radiating from a central region of said surface towards the periphery thereof.
12. A device according to Claim 11 comprising a peripheral
05 annular flange portion to embrace bone engaged by said radiating portions.
13. A device according to any preceding claim wherein said elements number five to thirty.
14. A device according to any preceding claim wherein said
10 elements each have a length in the range 3 to 15 cm.
15. A device according to any preceding claim wherein said elements each have a diameter in the range 0.25 to 2.0 mm.
16. A device according to Claim 9 wherein the plate form portion is provided with a part spherical surface to interface with the
15 bone.

1/2

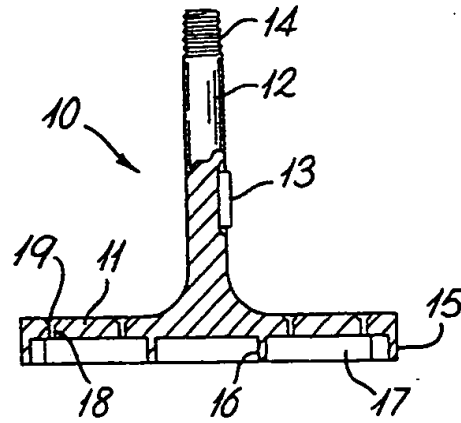


Fig. 1

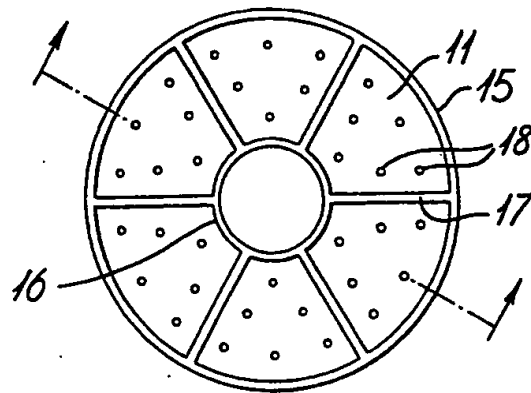


Fig. 2

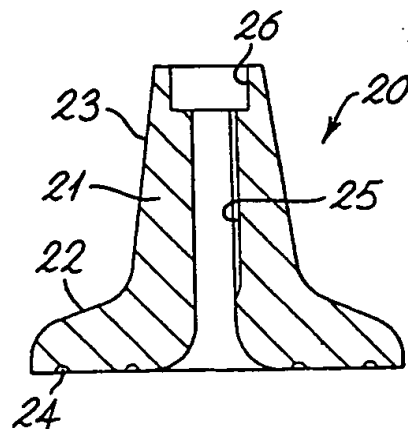


Fig. 3

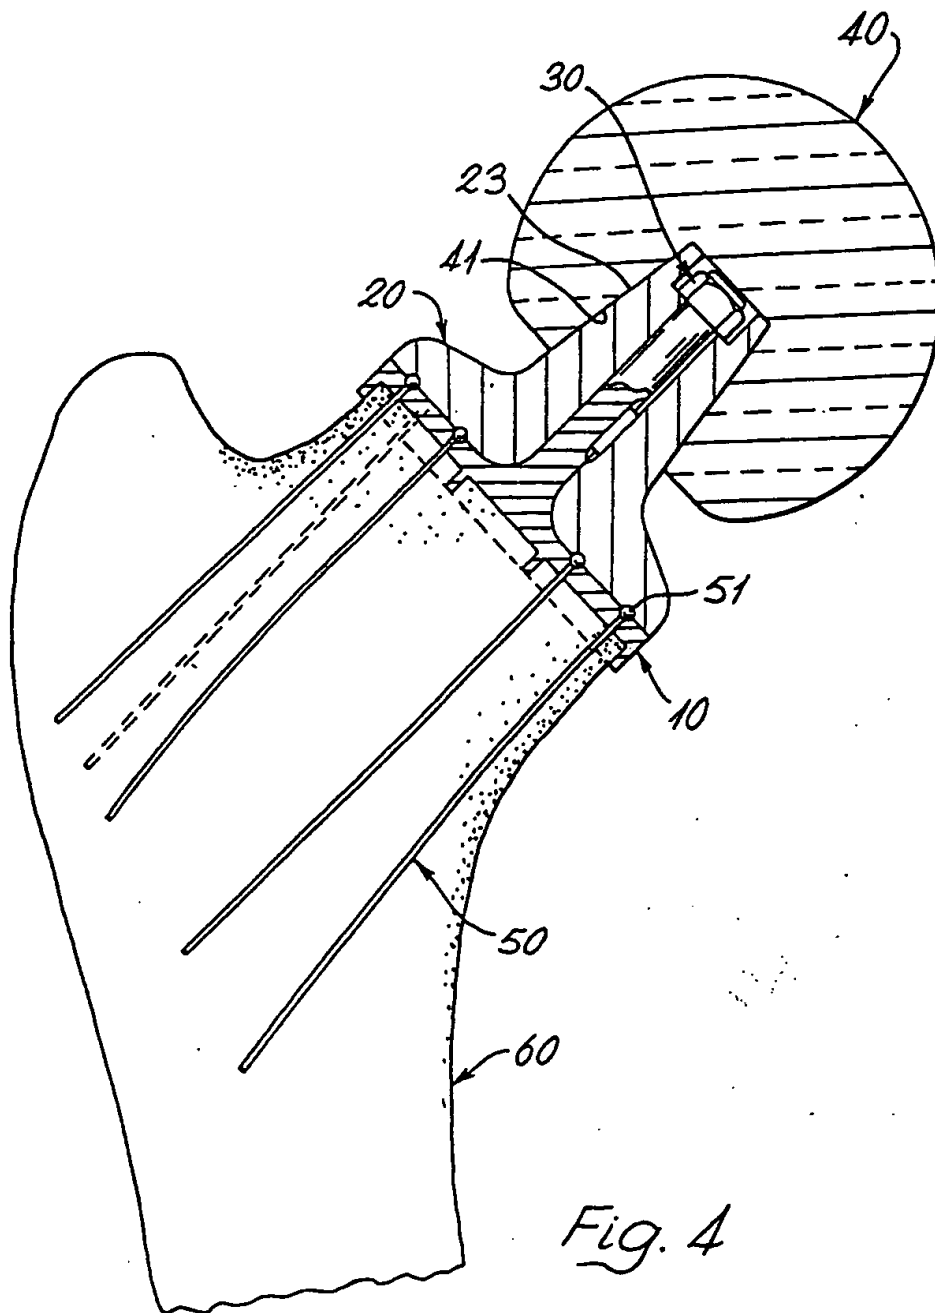


Fig. 4

(10)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

**0 094 829
B1**

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: 02.01.86

(51) Int. Cl.⁴: **A 61 F 2/30**

(21) Application number: **83302783.2**

(22) Date of filing: **17.05.83**

(64) **Endoprosthetic bone joint devices.**

(30) Priority: **17.05.82 GB 8214347**

(48) Date of publication of application:
23.11.83 Bulletin 83/47

(45) Publication of the grant of the patent:
02.01.86 Bulletin 86/01

(84) Designated Contracting States:
CH DE FR LI

(68) References cited:
DE-B-1 164 019
FR-A-2 519 545

PHYSICS IN MEDICINE & BIOLOGY, vol. 25, no.
4, July 1980, Pages 611-636, Bristol, GB, D.F.
WILLIAMS: "Implantable prostheses"

(73) Proprietor: **NATIONAL RESEARCH
DEVELOPMENT CORPORATION**
101 Newington Causeway
London SE1 6BU (GB)

(72) Inventor: **Field, Richard Eddy**
Park Manor Farm
Fearby near Masham North Yorkshire (GB)

(74) Representative: **Parker, Geoffrey**
Patent Department National Research
Development Corporation 101 Newington
Causeway
London SE1 6BU (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Courier Press, Leamington Spa, England.

EP 0 094 829 B1

Description

This invention concerns endoprosthetic bone joint devices and relates more particularly to the securement of such devices to bone, especially, but not exclusively, to one end of a long bone.

Various techniques for such securement have been proposed but those currently established in routine usage commonly involve the penetration into cancellous bone by elongate rigid members of significant size relative to the bone and as a proportion of the overall device.

In the most common of these techniques an elongate member is located as a clearance fit in a pre-prepared site and is secured by the use of a gap-filling medium such as an acrylic cement. While generally satisfactory in many instances, this technique can be problematical if any movement occurs at either of the two interfaces which exist between the gap-filling medium on the one hand and the member and the bone on the other hand. Moreover, such movement can occur as a natural consequence of the differing properties which in practice inevitably occur between the materials of the member, the medium and the bone, particularly as bone is a living material having properties which vary in an individual patient and from one to another. This technique has been improved in recent years by an emphasis on site preparation involving very thorough cleansing followed by pressurised application of the gap-filling medium to enhance the penetration thereof into the bone, but difficulty can still occur.

Another technique seeks to effect improvement by the use of a member having a porous coating or equivalent formation which affords securement not by way of a gap-filling medium but instead by the inward growth of natural fibrous material which ossifies within the member. This can be viewed as problematical by virtue of the inevitable initial period of significant length during which the device is relatively insecure and the patient must be at least partially immobilised. Moreover, longer term difficulty can arise by resorption of ossified in-grown material as a result of differential properties between this material and that of the member.

In yet another technique a member is secured by a tapered interference fit in the bone. A difficulty in this case is that either the fit is localised over only a part of the member such that movement can develop due to the forces acting on the device during subsequent use, or the fit is sufficiently extensive that the initial penetration involves a risk of undue damage to the bone. Again, differential material properties can cause difficulty.

It should be understood that these comments on particular techniques for securement to bone are by no means exhaustive but are intended to provide a brief and somewhat generalised appreciation of the difficulties of a complex situation. However, it will be evident that a common cause of difficulty arises from the largely

inevitable use of materials having different properties from bone, and such a difficulty is heightened in its consequences by use of those materials for penetration in relatively bulky form. Moreover, such penetration can be problematical in other ways. For example, the very nature of the penetration is such that any introduced infection will be deeply sited. Also, such penetration can require the removal of a significant volume of bone during site preparation and this is doubly disadvantageous in the consequent reduction of blood flow and in compromising the availability of remedial measures if the associated device is not successful.

It is also known from DE—B—1164019 to use several elongate pins in place of the single elongate member to secure the femoral portion of a hip joint prosthesis to the femur.

It should be mentioned for completeness in this general context that a securement technique does exist in which the above difficulties are notably less evident, but the technique is only commonly applicable to particular situations. The technique in question involves the use of relatively shallow devices having a relieved surface configuration, but no elongate members, for cooperation with a gap-filling medium in a naturally concave site such as the acetabulum of the hip joint. The same technique has been applied to form an effective capping for the femoral head at the hip, but this appears not have been sufficiently successful to have induced a widespread routine usage due, at least in part, to inadequacy of the resultant anchorage in surviving the forces which act thereon during subsequent usage of the device.

An object of the present invention is to provide a further technique, and devices therefor, whereby the various difficulties discussed above are reduced. To this end the invention centres in general terms on the provision of a multiplicity of filamentary elements to be driven through part of the device into bone.

Clearly, these elements will not possess, individually or collectively, the relative bulk of the prior penetrating elongate members and this contributes to a reduction in any potentially disadvantageous consequences which can otherwise arise from differential material properties or loss of bone as discussed above. At the same time the elements can penetrate the bone to a significantly greater extent than the prior relatively shallow relieved structures and so afford a more secure anchorage against the effects of the forces which occur in subsequent use of the device. Moreover, this last anchorage can be enhanced by penetration of the elements in a variety of directions to suit an individual situation, whereas the penetration geometry is largely predetermined with the prior devices.

The elements are intended to penetrate the cancellous material of the bone, including the trabecular structure of the medulla. The elements must have sufficient rigidity and other appropriate mechanical properties for this purpose so as to be substantially incompressible relative to

the bone material, but the elements will normally exhibit some transverse flexibility to allow bending. Such bending can act to facilitate introduction of the elements, and mutual splaying of the elements resulting from bending will enhance the overall anchorage. Also, a bending capability can potentially accommodate changes in the surrounding bone structure which a bulky rigid material cannot. In this last connection also, the elements are preferably made of a material having an elastic modulus generally similar to that for bone.

The elements are intended to be in direct contact with the bone material without the intervention of gap-filling medium, but the individual contribution of any one element to the overall resultant anchorage can be enhanced in various ways. For example, the elements can be roughened, barbed or otherwise formed to act mechanically against subsequent movement relative to the bone. Also, the elements can be treated or formed to induce or accommodate growth of bone into intimate contact therewith. In one form of the invention for this purpose, the elements are employed covered with or incorporate material such as hydroxyapatite beneficial to bone growth as a substrate, nutrient or protection. In another such form of the invention, the elements are covered with or incorporate a material having negative electrochemical potential with respect to other parts of the device to induce natural growth towards the elements. These two forms of the invention can be combined if the added material gives rise to cathodic dissolution products beneficial to bone growth, or if the cathodic dissolution progressively releases, or exposes for release, additional material incorporated therewith.

In practice the elements can be provided with a uniform length equating with the maximum likely to be needed, with this length being shortened selectively by the surgeon as required in individual situations. Alternatively, a range of lengths can be supplied by the manufacturer.

Also in practice it is appropriate to provide the elements with enlargements at one end for captive locking under compression between two parts of the related device with the free ends of the elements penetrating the bone.

Another preferred feature of the invention is that the part of the device to be located against the bone which the elements penetrate should have a flanged formation projecting therefrom to engage a corresponding slot formation cut in the bone, these formations being multi-directional. More particularly, it is further preferred at present that this formation on the device should comprise flange portions radiating from the central region of the bone-engaging part towards the periphery thereof to transfer shear force loads towards the bone cortex, which last can suitably be embraced by a peripheral annular flange portion.

The invention as so far described is clarified, by way of example, with reference to one

embodiment thereof illustrated in the accompanying drawings in which:—

Figures 1 and 2 respectively illustrate one part of the embodiment in partially sectioned side view and inverted plan view,

Figure 3 illustrates in cross-sectional view another such part, and

Figure 4 illustrates these two parts in use with other parts and the associated filamentary elements.

The embodiment of the drawings is a femoral component for use in the hip joint as a hemiarthroplasty in replacement of the natural femoral head, or in that joint as part of a total arthroplasty additionally involving an acetabular component replacing the associated natural pelvic socket in which the head articulates.

The component part in Figure 1 is denoted 10 and comprises a plate 11 of disc form having a shaft 12 projecting coaxially from one side thereof. This shaft is formed with a key, spline or similar anti-rotation formation at 13 towards its base and is also externally threaded at 14 towards its free end.

On its other side the plate has a flange formation projecting axially therefrom, this formation including a peripherally and concentrically located outer annular skirt 15, a centrally and concentrically located inner annular skirt 16, and a plurality of radially interconnecting webs 17.

Lastly, the part 10 has a plurality of apertures 18 passing axially therethrough between the skirts and webs, each such aperture opening into a hemispherically countersunk recess 19 in the one side of the plate.

The component part of Figure 3 is denoted 20 and comprises an annular body 21 which converges over its length, which length corresponds to that of shaft 12, through a curved portion 22 at the wider end to a terminal conical taper 23 at the narrow end.

The wider end of the body is of corresponding shape to plate 11 and has a plurality of hemispherical recesses 24 corresponding in diameter and distribution to recesses 19. The central passageway of the body is formed with a keyway, spline or other formation at 25 towards the wider end in complementary manner to that at 13 on the shaft 12 to engage non-rotatably thereon with the recesses 19 and 24 superimposed, and the passageway is counterbored at 26 at the narrow end of the body.

Figure 4 illustrates remaining parts of the component. The parts in question comprise a nut 30 to engage the thread 14 of shaft 12 and seat in the counterbore 26 of body 21, a ball 40 having a conically tapered bore 41 partway therethrough to engage the taper 23 of body 21, and a plurality of filamentary elements 50 sized to pass through apertures 18 and having spherical enlargements 51 at one end complementary with recesses 19 and 24.

Use of the component is also shown by Figure 4. The femoral head of a femur indicated in partial

outline at 60 is excised through the neck to receive component part 10 thereover. The flange formation of this part engages the bone, complementary slots having been cut in the latter to receive the webs 17 and the inner skirt impacting into the upper end of the medulla.

The filamentary elements 50 are then driven through respective apertures 18 into the cancellous bone, the terminal enlargements 51 seating in the recesses 19. The elements are driven in varying directions, suitably to follow the general trabecular pattern in the bone, the elements being selectively sized to avoid emergence through the bone cortex.

Thereafter the component part 20 is engaged over and keyed with the part 10 to seat its recesses 24 over the enlargements 51, this sub-assembly is secured by the nut 30, and the ball 40 is engaged on the part 20 by interference fit between the respective mutually complementary tapers 41 and 23.

The filamentary elements can number between five and thirty, and suitably vary between 3 and 15 cm in length and 0.25 and 2.0 mm in diameter. Regarding materials: the elements are suitably of surface sintered high tensile titanium wire with titanium heads welded thereon, the component parts 10 and 20 are suitably of a cast chromium-cobalt alloy, the nut can be of similar metal to the last parts but with a polyethylene linear to lock the same, and the ball is suitably of a ceramic.

While the invention has just been described with more particular reference to the illustrated embodiment, it is variable in different ways.

Application is, of course, not confined to a femoral component. However this example is apt insofar as such components are the longest established and still most widely used in routine orthopaedic practice involving an endoprosthesis. In addition femoral components in common current usage typify the difficulties first discussed above.

Also, the materials suitable for use with the invention can vary from those indicated for the embodiment and can include other metals, and synthetic and composite materials. Carbon composite material, such as carbon-reinforced carbon fibre form, is thought particularly suitable for the penetrating elements because the elastic modulus can be similar to that for bone and a selected porosity can be provided.

The number and distribution of the penetrating elements can of course be varied to suit individual circumstances. However, it is thought appropriate to concentrate these elements medially and laterally in relation to the femur, these locations being, according to current thinking and understanding, the main load bearing regions within the femur. Moreover, because these regions are considered to be respectively subject to compressive and tensile load forces, the elements may be correspondingly of different forms to better take account of these forces.

The shape of the disc form plate can vary between circular and substantially elliptical to suit

the direction of the cut made to excise the femoral head. In nature, apart from differences in overall bone size, the femoral neck has a cross-sectional shape which progresses from circular just below the head to elliptical towards the greater trochanter. Thus provision of a range of shapes as above will be appropriate to suit variation of cut direction by the surgeon and some of this range can be associated with a shaft which is slightly inclined from an axial disposition to allow for a slightly oblique cut. However, it is expected that further development of the invention will determine optimum excision geometry whereby a requirement for undue variation in component geometry is avoided.

A further alternative which may well be found to be preferable is to form the distal surface of the plate, i.e. that surface which is in a position with the cut surface of the femoral head, as part of a sphere such that all points of contact between plate surface and bone are equidistant from the centre of the prosthetic femoral head. Furthermore the radius of the sphere will be equal to the distance between the centre of the prosthetic head and the plate to bone interface. By this configuration it is predicted that with the exception of frictional forces arising from the interface between the prosthetic femoral head and the acetabular component, all forces passing through the femoral neck will pass through the plate to bone interface perpendicular to the interface thus minimising or avoiding shear forces on this interface.

It may also be advantageous to provide a range of separate peripheral skirt members for the proposed femoral component, such members being intended to clip in place. These members will serve to provide a smooth surface to abut with adjacent muscles and other parts of the natural capsule of the hip joint, and offer a choice of depth to suit the requirements of individual patients in this respect.

In yet another variation, the radial flanges can be extended to penetrate the bone further and, in fact, act as the main anchorage for the component. In this case the flanges are, as noted for the filamentary elements, preferably matched to bone in respect of elastic modulus, and additionally formed to promote in-growth. Indeed, these last features can be suitably increased in effect towards the free ends of the flanges.

Lastly, as an indication of the powers of securement afforded by the presently proposed technique: a simplified form of the illustrated embodiment has been made without flanges and secured to the femoral neck of a glycerine embalmed femur with 12 filaments each no longer than 4 cm. This mock-up was tested on an Instron or other compression loading machine at loads of up to 454 kg (1000 lb) without evident deformation either visually or as judged by comparison of pre- and post-stress X-rays.

Claims

1. An endoprosthetic bone joint device

comprising a multiplicity of filamentary elements (50) drivable through a part (10) of the device into penetrating engagement with a bone (60) to secure the part (10) thereto.

2. A device according to Claim 1 wherein said elements (50) exhibit transverse flexibility.

3. A device according to Claim 2 wherein said elements (50) have an elastic modulus similar to that of bone.

4. A device according to Claim 1, 2 or 3 wherein said elements (50) are roughened, barbed or otherwise formed to act against movement relative to bone when penetrated therinto.

5. A device according to any preceding claim wherein said elements (50) are treated or formed to induce or accommodate growth of bone into intimate contact therewith.

6. A device according to Claim 5 wherein said elements (50) are covered with or incorporate material beneficial as a substrate, nutrient or protection for bone growth.

7. A device according to Claim 5 or 6 wherein said elements (50) are covered with or incorporate material having a negative electrochemical potential with respect to other parts of the device.

8. A device according to any preceding claim wherein said elements (50) each have an enlargement (51) at one end thereof captively lockable between two parts (10, 20) of the device.

9. A device according to Claim 8 wherein one (10) of said parts (10, 20) has a plate form portion (11) having distributed thereover a plurality of transverse passageways (18) to receive individually therethrough said elements (50) and countersunk (19) on one side of said portion to seat said enlargements (51), and the other (20) of said parts has a surface complementary with said one side and formed with a plurality of recesses (24) in corresponding distribution to said passageways (18) to seat individually said enlargements (51) therein, said two parts (10, 20) being securable together with said passageways (18) and recesses (24) superposed.

10. A device according to any preceding claim wherein the first-mentioned part (10) thereof has a bone-engaging surface with a multi-directional flange formation (15, 16, 17) projecting therefrom to engage a corresponding formation cut in bone (60).

11. A device according to Claim 10 wherein said flange formation comprises a plurality of flange portions (17) radiating from a central region of said surface towards the periphery thereof.

12. A device according to Claim 11 comprising a peripheral annular flange portion (15) to embrace bone engaged by said radiating portions (17).

13. A device according to any preceding claim wherein said elements (50) number five to thirty.

14. A device according to any preceding claim wherein said elements (50) each have a length in the range 3 to 15 cm.

15. A device according to any preceding claim wherein said elements (50) each have a diameter in the range 0.25 to 2.0 mm.

16. A device according to Claim 9 wherein the

plate form portion (11) is provided with a part spherical surface to interface with the bone (60).

Revendications

1. Endoprothèse d'articulation comprenant plusieurs éléments filamenteux (50) pouvant être introduits à travers une partie (10) du dispositif d'articulation pour pénétrer et se fixer dans un os (60) pour y fixer la partie (10) de prothèse.

2. Endoprothèse selon la revendication 1, dans laquelle lesdits éléments (50) présentent de la flexibilité transversale.

3. Endoprothèse selon la revendication 2, dans laquelle lesdits éléments (50) ont un module d'élasticité semblable à celui de l'os.

4. Endoprothèse selon la revendication 1, 2 ou 3, dans laquelle lesdits éléments (50) sont rendus rugueux, munis de barbes ou formés autrement de manière à agir contre un mouvement relatif par rapport à l'os quand ils y sont fixés par pénétration.

5. Endoprothèse selon l'une quelconque des revendications précédentes, dans laquelle lesdits éléments (50) sont traités ou formés de manière à induire ou accepter la croissance de l'os avec lequel ils sont en contact intime.

6. Endoprothèse selon la revendication 5, dans laquelle lesdits éléments sont recouverts d'une matière bénéfique à titre de substrat, de matière nutritive ou de protection pour la croissance de l'os, ou incorporent une telle matière.

7. Endoprothèse selon la revendication 5 ou 6, dans laquelle lesdits éléments (50) sont recouverts d'une matière ayant un potentiel électrochimique négatif par rapport aux autres parties de la prothèse, ou bien ces éléments incorporent une telle matière.

8. Endoprothèse selon l'une quelconque des revendications précédentes, dans laquelle lesdits éléments (50) ont chacun une partie élargie (51) à une de leurs extrémités pouvant être verrouillée en étant emprisonnée entre deux parties (10, 20) de la prothèse.

9. Endoprothèse selon la revendication 8, dans laquelle l'une (10) desdites parties (10, 20) comporte une partie (11) en forme de plateau dans lequel sont distribués plusieurs passages (18) transversaux destinés à laisser individuellement passer lesdits éléments (50) et comportant d'un côté de cette partie un fraisage (19) destiné à constituer la siége desdites parties élargies (51) et dont l'autre (20) des parties présente une surface complémentaire de ce côté et comporte plusieurs creux (24) dont la distribution correspond auxdits passages (18) pour constituer le siége individuel desdites parties élargies (51), ces deux parties (10, 20) pouvant être fixées ensemble avec superposition desdits passages (18) et desdits creux (24).

10. Endoprothèse selon l'une quelconque des revendications précédentes, dans laquelle la partie (10) mentionnée en premier lieu comporte une surface venant au contact de l'os et présentant une formation de type rebords (15, 16, 17) multi-

directionnels qui en fait saillie pour venir au contact d'une formation correspondante découpée dans l'os (60).

11. Endoprothèse selon la revendication 10, dans laquelle cette formation de type rebords comprend plusieurs rebords (17) rayonnant d'une partie centrale de cette surface vers sa périphérie.

12. Endoprothèse selon la revendication 11, comprenant un rebord annulaire périphérique (15) destiné à entourer l'os avec lequel lesdites parties rayonnantes (17) viennent en contact.

13. Endoprothèse selon l'une quelconque des revendications précédentes, dans laquelle lesdits éléments (50) sont au nombre de cinq à trente.

14. Endoprothèse selon l'une quelconque des revendications précédentes, dans laquelle lesdits éléments (50) ont chacun une longueur comprise entre 3 et 15 cm.

15. Endoprothèse selon l'une quelconque des revendications précédentes, dans laquelle lesdits éléments (50) ont chacun un diamètre compris entre 0,25 et 2,0 mm.

16. Endoprothèse selon la revendication 9, dans laquelle la partie (11) en forme de plateau comporte une surface partiellement sphérique destinée à constituer l'interface avec l'os (60).

Patentansprüche

1. Gelenkendoprothese mit einer Vielzahl fadenförmiger Elemente (50), die durch einen Teil (10) der Prothese mit einem Knochen (60) in eindringende Verbindung gebracht werden, um den Teil (10) daran zu befestigen.

2. Gelenkendoprothese nach Anspruch 1, dadurch gekennzeichnet, daß die Elemente (50) eine transversale Flexibilität besitzen.

3. Gelenkendoprothese nach Anspruch 2, dadurch gekennzeichnet, daß die Elemente (50) einen Elastizitätsmodul besitzen, der dem des Knochens entspricht.

4. Gelenkendoprothese nach Anspruch 1, 2 oder 3, dadurch gekennzeichnet, daß die Elemente (50) angerauht, mit Widerhaken versehen, oder anderweitig ausgebildet sind, um gegen eine relativ zum Knochen wirkende Bewegung zu agieren, wenn sie darin eindringen.

5. Gelenkendoprothese nach irgendeinem der vorstehenden Ansprüche, dadurch gekennzeichnet, daß die Elemente (50) behandelt oder ausgebildet sind, um ein Wachstum des Knochens in innigem Knotakt damit zu induzieren bzw. aufzunehmen.

6. Gelenkendoprothese nach Anspruch 5, dadurch gekennzeichnet, daß die Elemente (50) mit einem Material bedeckt sind oder dieses aufweisen, das als Substrat oder Nährmittel für das Knochenwachstum dient.

7. Gelenkendoprothese nach Anspruch 5 oder 6, dadurch gekennzeichnet, daß die Elemente (50) mit einem Material überzogen sind oder dieses aufweisen, das ein negatives elektrochemisches

Potential in Bezug zu den anderen Teilen der Prothese aufweist.

8. Gelenkendoprothese nach irgendeinem der vorstehenden Ansprüche, dadurch gekennzeichnet, daß die Elemente (50) jeweils eine Vergrößerung (51) an ihrem einen Ende aufweisen, das zwischen den beiden Teilen (10, 20) der Prothese unverlierbar befestigt ist.

9. Gelenkendoprothese nach Anspruch 8, dadurch gekennzeichnet, daß eines (10) der Teile (10, 20) einen plattenförmigen Teil (11) besitzt, über dessen Fläche eine Vielzahl transversaler Durchtrittsöffnungen (18) verteilt ist, um durch diese einzeln die genannten Elemente (50) und eine Senkschraube (19) auf der einen Seite des Teils aufzunehmen, um die Vergrößerung (51) zu befestigen, wobei das andere (20) der Teile eine Fläche besitzt, die komplementär zu der genannten einen Seite und mit einer Vielzahl von Ausnehmungen (24) in korrespondierender Verteilung zu den Durchtrittsöffnungen (18) geformt ist, um die Vergrößerungen (51) darin einzeln aufzunehmen bzw. zu befestigen, wobei die beiden Teile (10, 20) mit den Durchtrittsöffnungen (18) und den darüber liegenden Ausnehmungen (24) miteinander zu befestigen.

10. Gelenkendoprothese nach irgendeinem der vorstehenden Ansprüche, dadurch gekennzeichnet, daß der ersterwähnte Teil (10) eine den Knochen berührende Fläche mit einer mehrfach ausgerichteten Flanschformation (15, 16, 17) besitzt, die daraus hervorragt, um mit einer entsprechenden Formation in Eingriff zu treten, die in den Knochen (60) hineingeschnitten ist.

11. Gelenkendoprothese nach Anspruch 10, dadurch gekennzeichnet, daß die Flanschformation eine Vielzahl an Flanschteilen (17) umfaßt, die aus dem mittigen Bereich der Fläche in Richtung des Außenumfangs hinaus verlaufen.

12. Gelenkendoprothese nach Anspruch 11, dadurch gekennzeichnet, daß ein umfangsmäßiger Ringflanschteil (15) den Knochen umgreift, welcher mit den hinausverlaufenden Teilen (17) in Eingriff steht.

13. Gelenkendoprothese nach irgendeinem der vorstehenden Ansprüche 1 bis 12, dadurch gekennzeichnet, daß die Elemente (50) in ihrer Anzahl 5 bis 30 betragen.

14. Gelenkendoprothese nach irgendeinem der vorstehenden Ansprüche, dadurch gekennzeichnet, daß die Elemente (50) jeweils eine Länge im Bereich von 3 bis 15 cm aufweisen.

15. Gelenkendoprothese nach irgendeinem der vorstehenden Ansprüche, dadurch gekennzeichnet, daß die Elemente (50) jeweils einen Durchmesser im Bereich von 0,25 bis 2,0 mm aufweisen.

16. Gelenkendoprothese nach Anspruch 9, dadurch gekennzeichnet, daß der plattenförmige Teil (11) mit einer teilweise sphärischen Fläche versehen ist, um eine Grenzfläche mit dem Knochen (60) zu bilden.

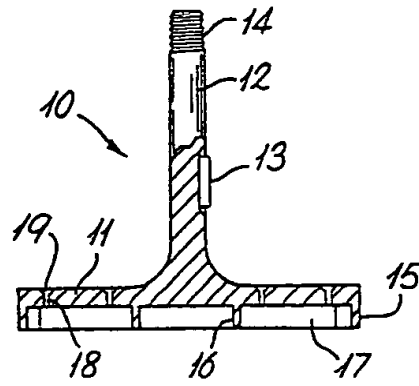


Fig. 1

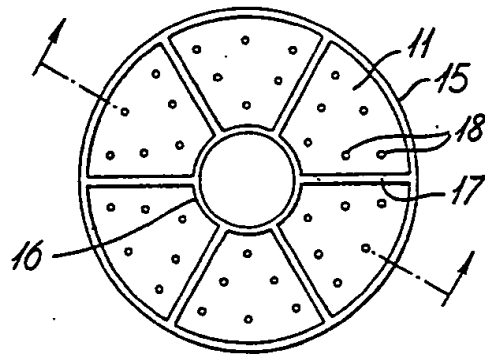


Fig. 2

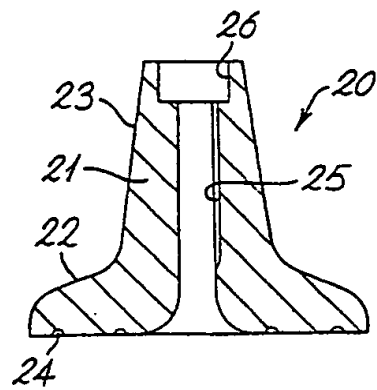


Fig. 3

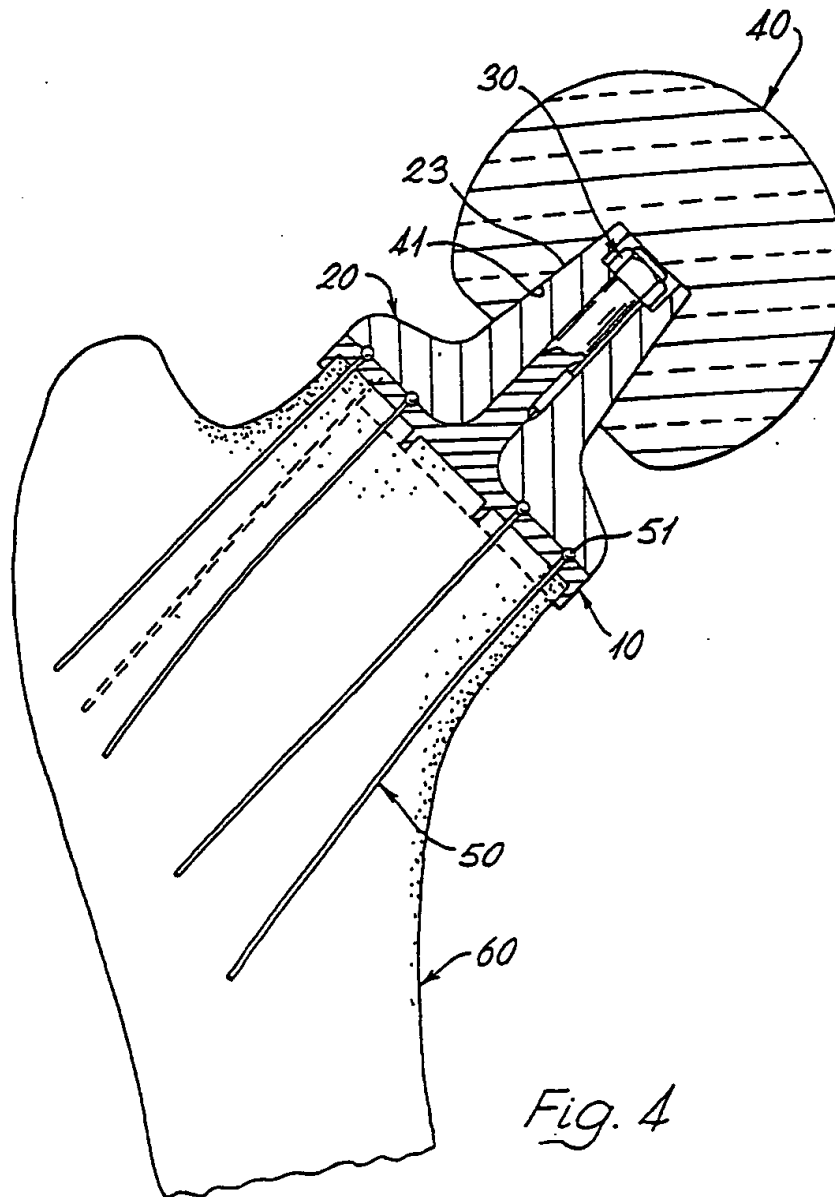


Fig. 4

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.